WAYNE®

SUMP PUMPS
battery back-up systems

SUMP MINDER™

3 Year Warranty
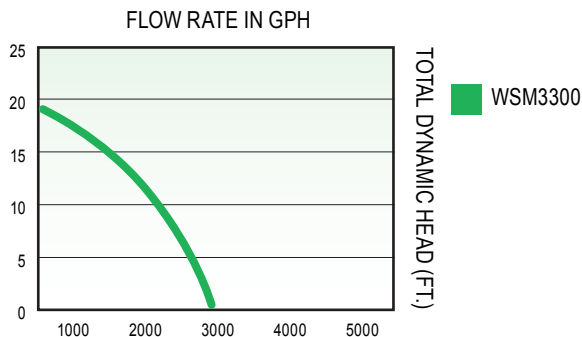
- Microprocessor Controller checks for AC power and battery status, then self-tests for float and 12V pump operation every 14 Days

- Dialer Notification calls any number you choose to alert you to a problem before flooding occurs. Program up to 3 phone numbers—your cell phone, your neighbor, the plumber.

- Easily connects to any standard phone line (telephone service required for Auto dialer function)

- Includes connection port for 3rd party security system notification

- Smart Charging Technology eliminates surface charge and brings battery back to optimal levels.

- Use any deep cycle 12V battery, wet cell (SLA) or maintenance free (battery not included)

- Powerful DC pump moves up to 3300 GPH @ 0 feet

WSM3300

PERFORMANCE

Model	Discharge Head	0'	5'	10'	15'	20'
WSM3300	Gallons/Hour	3300	2800	2300	1500	100

FLOW RATE IN GPH

TOTAL DYNAMIC HEAD (FT.)

■ WSM3300

ADVANCED NOTIFICATION

CONDITION

PRIMARY PUMP STATUS

Condition	Message	Audible	Call Phone	Security
AC Power Interrupted	!	🔊	☎	🛡
Primary Pump Suspect	!	🔊	☎	

BACK-UP DC PUMP STATUS

Condition	Message	Audible	Call Phone	Security
DC Pump In Operation	!	🔊		🛡
DC Pump Not Operable (Failed Test)	!	🔊	☎	
Check Floats For Debris	!	🔊		
Capacity Overflow Possible	!	🔊	☎	
DC Impeller Locked	!	🔊	☎	

BATTERY CHARGER

Condition	Message	Audible	Call Phone	Security
Transformer Bad	!	🔊	☎	🛡

MICROPROCESSOR CONTROLLER

Condition	Message	Audible	Call Phone	Security
Blown Controller Fuse	!	🔊	☎	🛡

12 V BATTERY STATUS

Condition	Message	Audible	Call Phone	Security
DC Pump Under Test	!			
Battery Fully Charged	!			
Battery 80% Charged	!			
Battery 60% Charged	!			
Battery 40% Charged	!	🔊		
Battery 20% Charged	!	🔊	☎	
Battery Dead	!	🔊	☎	🛡
Battery Condition Questionable	!	🔊	☎	
Reverse Polarity		🔊		

! MESSAGE ON UNIT SCREEN   🔊 AUDIBLE ALARM
☎ CALL PHONE   🛡 SECURITY SYSTEM

SUMP MINDER™

DEEP CYCLE BATTERY SIZE

IF YOUR SUMP PUMP RUNS....

	1X EVERY MINUTE	1X EVERY 5 MINUTES	1X EVERY 10 MINUTES
	HOURS OF PROTECTION		
40 A-Hr	12 Hr	53 Hr	92 Hr
75 A-Hr	23 Hr	100 Hr	172 Hr

Battery not included. Assumes a typical 10 ft. rise on the discharge pipe, and 17 inch diameter sump pit. Results may vary.