


1/3 HP Primary Pump With 12V Back-up Pump System

Pre-assembled
piping and
check valves.



**MAXIMUM
HEAD
OF 20
FEET**

300828BUPP

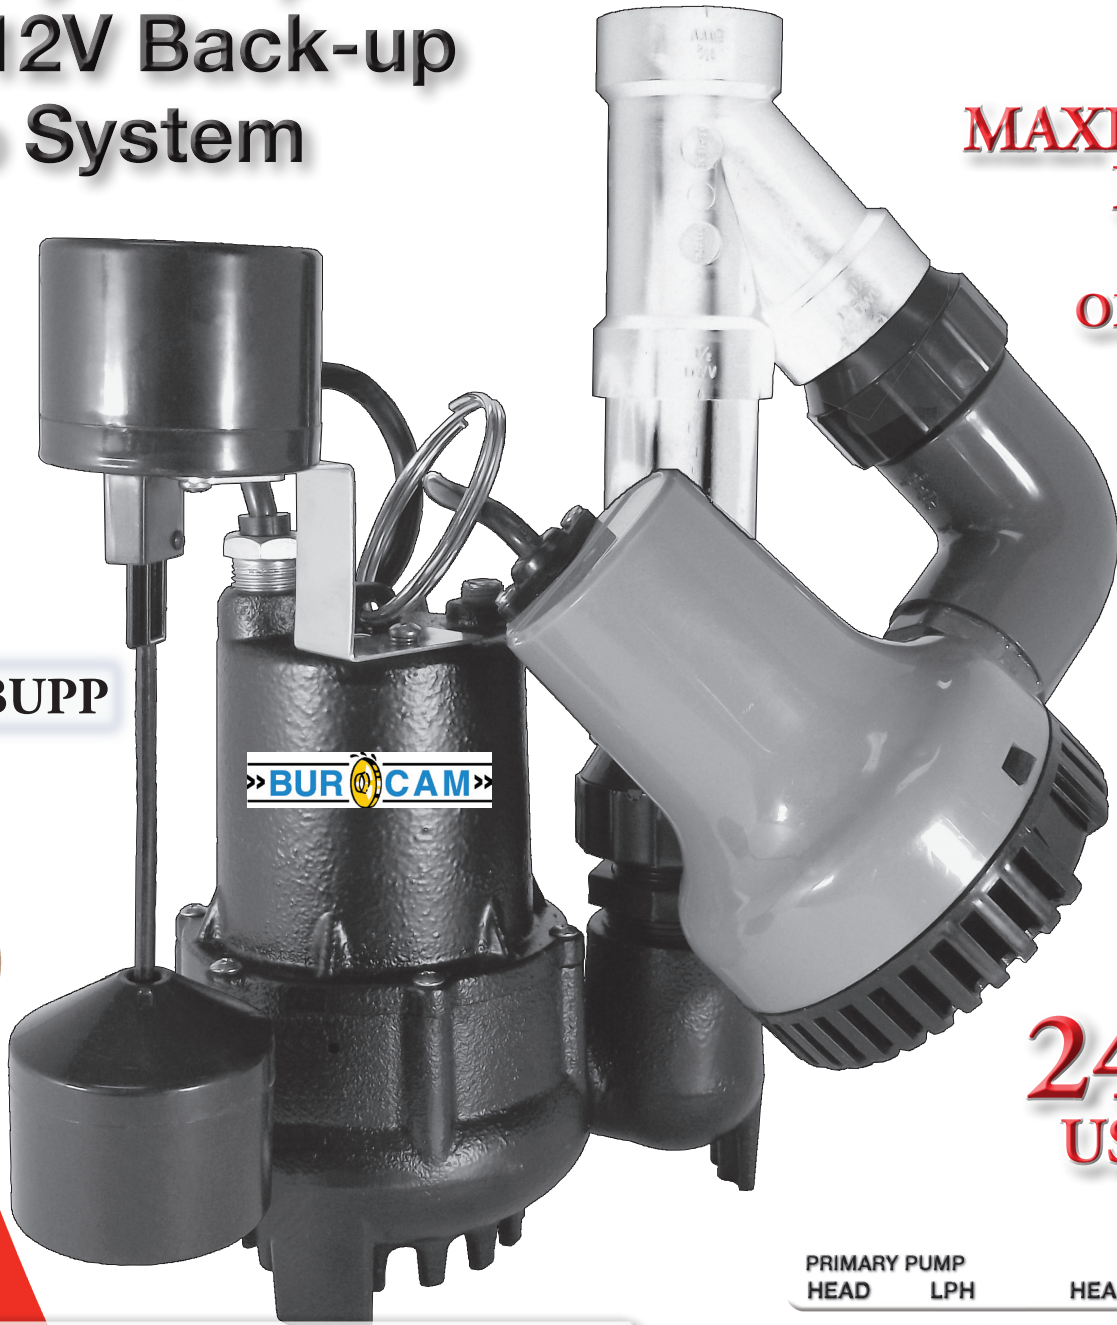

**2400
US GPH**

- Vertical float switch operates in basin as small as 14" or larger.
- Automatic start - stop cycle.
- 9' grounded electric cables.
- Oil cooled, high efficiency motor.
- 1 1/2" discharge.

Prevents expensive water damage in case of power outage or primary sump pump failure.

| PRIMARY PUMP | | | |
|--------------|------|------|-------|
| HEAD | LPH | HEAD | USGPH |
| 6,0 m | 1100 | 20' | 300 |
| 4,5 m | 3400 | 15' | 900 |
| 3,0 m | 6000 | 10' | 1600 |
| 1,5 m | 9000 | 5' | 2400 |

Friction loss in pipe not included

| BACK-UP PUMP | | | |
|--------------|------|------|-------|
| HEAD | LPH | HEAD | USGPH |
| 3,5 m | 3860 | 10' | 1020 |
| 2,5 m | 4540 | 8' | 1200 |
| 1,2 m | 5300 | 4' | 1600 |

Friction loss in pipe not included