

CONSTRUCTION

- Stainless steel shaft and fasteners, for reliability long term in tough sewage applications
- Heavy-duty upper and lower ball bearings for long life and quiet operation
- 3 in. NPT discharge with 2 in. adapter capable of handling 2 in. solids
- 20 ft. SJTW power cord is oil and water resistant, with neoprene grommet for superior seal
- For use in 18 in. diameter or larger sump basins

SWITCH

- Control box or pump switch required (sold separately, see accessories section)
- ON / OFF levels are user adjustable

SEALS

- Carbon / ceramic shaft seal for maximum life

MOTOR

- PSC oil-filled motor, thermally protected motor prevents overheating


3/4 HP CAST IRON COMMERCIAL GRADE SEWAGE PUMP 180 GPM @ 10 FT.



3/4 HP




DIMENSIONAL DATA (INCHES)

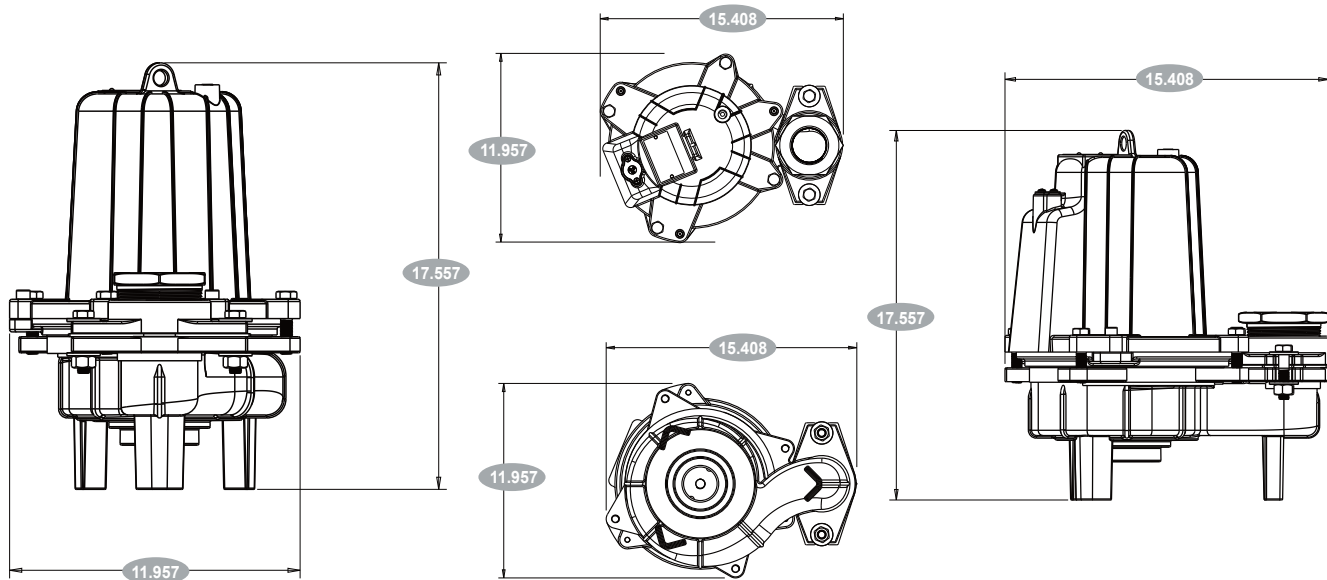


PUMP SNAPSHOT

		Dimensions (in.)							
HP	Construction	Switch Type	Length	Width	Height	Weight	Volts	Footprint	Power Cord
3/4	Cast Iron	Control Box	15.408	11.957	17.557	104 lbs	240	18 in.	Hard Wire
Impeller	Intake	Discharge	Submersible	UPC 0-40066					
2-Vane	Bottom Suction	3 in. NPT	Yes	216311					

TYPICAL INSTALLATION

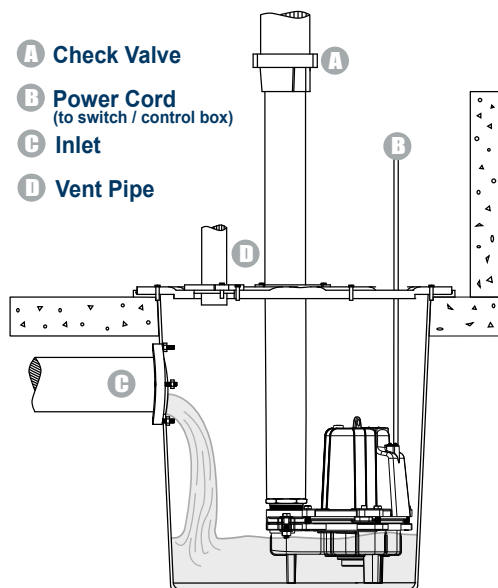

75SW PERFORMANCE

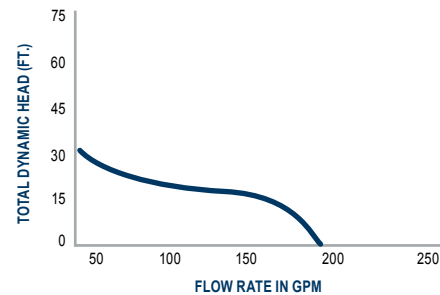

Discharge Head	10 ft.	15 ft.	20 ft.	25 ft.
GPM	180	150	110	65