




# THERMOPLASTIC SUMP PUMP

**MODEL 12356 1/2 HP**  
**MODEL 12558 1/3 HP**



- Rugged thermoplastic body resists corrosion, impact, stress and heat
- Maximum pumping capacity to 3180 gallons per hour
- Tethered float switch designed for minimum 14" diameter sump basin
- Built in overload protection with automatic reset
- Easy Installation, includes 8' power cord

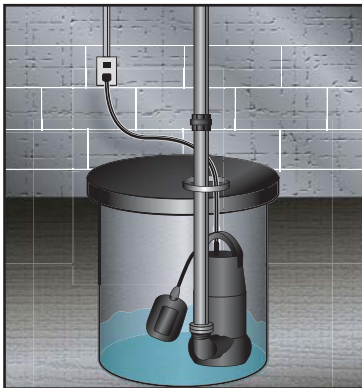

### PERFORMANCE

Model	HP	Warranty	Discharge Height Above Pumping Level (GPH)					Max. Lift
			0'	10'	20'	25'	28'	
<b>12356</b>	1/2	1-year	3180	2700	2040	1500	0	30'
<b>12558</b>	1/3	1-year	2880	2460	1800	1200	0	28'

### ORDERING INFORMATION

Model	UPC	Carton (L x W x H)	Cube	Pallet Qty.	Weight
<b>12356</b>	0 22315 34104 3	8.66" x 6.29" x 12.99"	.41	105	13 lbs.
<b>12558</b>	0 22315 34103 6	8.66" x 6.29" x 12.99"	.41	105	12 lbs.