



# PRODUCT SPECIFICATIONS - MODEL 92301 - 1/3 HP PEDESTAL SUMP PUMP

## APPLICATIONS

PEDESTAL SUMP PUMP FOR TYPICAL RESIDENTIAL & COMMERCIAL APPLICATIONS.

## MOTOR SPECIFICATIONS

Horsepower	1/3 HP Permanent Split Capacitor
Volts	120
Hz	60
Amps	2.76
Watts	331
Speed	1725 rpm
Phase	Single
Circuit Requirements	15 amp
Duty Rating	Continuous
Capacitor rating	20 uf
Insulation	Class A
Motor Shaft	Stainless Steel
Motor Bearings	Ball
Cooled by	Air cooled
Thermally Protected	Yes - 248°F (120°C)
UL Listed	Yes - E238091

## PUMP SPECIFICATIONS

Discharge Size	1 1/2" FNPT
Power Cord	10' - Type SJTW - Water Resistant, 18 Gauge
Housing	Cast Iron
Base	Cast Iron
Column	Painted Steel
Drive Shaft	Stainless Steel
Impeller Material	Stainless Steel
Impeller Type	Non-Clogging - Open type
Solids Handling	3/16"
Liquid Temp. Range	32°-180° F
Fasteners	Stainless Steel


## FLOAT SPECIFICATIONS

Type	Vertical, Pump Mounted
Material	Copper

## PERFORMANCES

Max Flow Rate	50 Gallons Per Minute
Maximum Head	20 Feet
Max PSI	8.65

PERFORMANCE CURVE

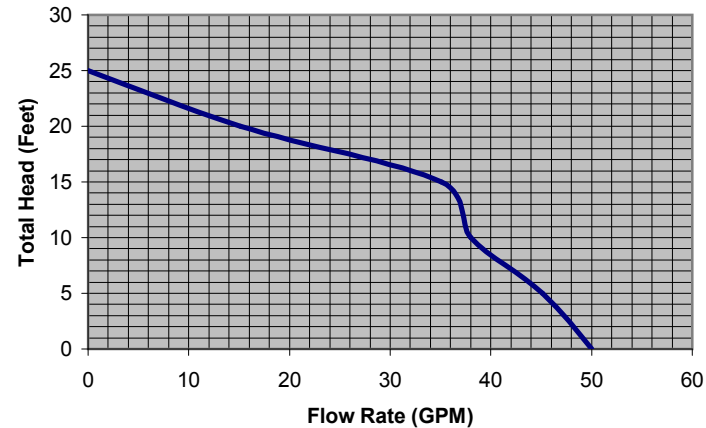

PERFORMANCE CHART

Discharge Height	0'	5'	10'	15'	20'	25'
Gallons per Minute	50	45	38	35	15	0
Gallons per Hour	3000	2700	2280	2100	900	0



E238091  
10RR

## DIMENSIONS

