VS-P2800 Series





Applications

 Little Giant VS-P Series Sump Pumps are rated for continuous duty in basement sump pits and dewatering areas where small debris is present


Features


- 1/3 hp motor with thermal overload protection
- Plastic volute made of corrosion-proof ABS
- 1-1/4" FNPT discharge
- Handles liquids and solids up to 1/4"
- Adjustable automatic operation with integral snap-action float switch:

• "On" Level: 10"-5"

• "Off" Level: 9"- 4"

Engineering Data



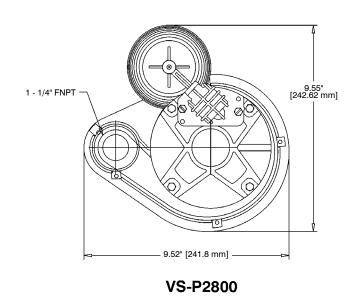


Specifications

Item No.	Model No.	НР	Volts	Amps	Watts	Performance (GPM @ Head)			Shut Off		Cord Length	Weight	Dimensions
						5'	10'	15'	Feet	PSI	(ft)	(lbs)	(H x L x W in)
547151	VS-P2800	1/3	115	4	316	46.6	34	10.3	17	7.4	8	16	33 x 9.52 x 9.55

Construction					
Impeller Material	PVC				
Impeller	Semi-open non-clog				
Volute	ABS				
Power Cord	8', 18-3, SJOW				
Fasteners	Anodized steel				
Drive Shaft	PVC				

Performance Data

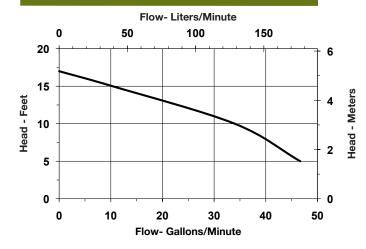



P.O. Box 12010 Oklahoma City, OK 73157-2010 Phone: 1.800.701.7894 Fax: 1.800.678.7867 www.LittleGiantPump.com

