

PF92941



Pre-Assembled Primary & Backup Sump Pump System

Pre-Assembled System Includes

- .3 HP cast iron primary sump pump (PF92341).
- 12 Volt DC thermoplastic back up pump (PF92910).
- Two - 1-1/2" check valves, pipe & fittings.

Product Features - Primary Pump

- .3 HP cast iron sump pump with vertical float switch.
- Permanent split capacitor motor.
- 1-1/2" Discharge.
- Handles 3/8" solids.
- Passes laundry lint.
- Clog resistant stainless steel impeller.
- Will handle temperatures up to 120° F.
- Pumps up to 46 gpm.
- Stainless steel fasteners.
- 10' Power cord.
- UL listed.

Product Features - Backup Pump

- 12 Volt DC pump with vertical float switch.
- Alarm/control panel with fuse and mute feature.
- Thermoplastic battery box.
- 2 amp AC battery charger with 10' power cord.
- Battery sold separately.
- Pumps up to 23 gpm.
- 1-1/4" or 1-1/2" NPT discharge size.
- Handles 1/8" solids.


Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed products to fill any order unless we agree in writing to do otherwise.

- 12 Volt Battery Backup Pump Systems - 3-year limited warranty
- Pre-Assembled Primary & Backup Sump Pump Systems - 3-year limited warranty



PF92941

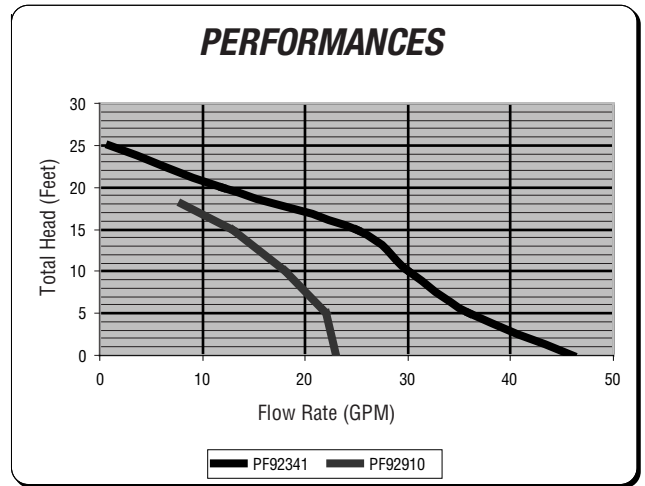

Discharge Height	0'	5'	10'	15'	20'	25'
PF92341 gpm	46	36	30	25	12	1
PF92910 gpm	23	22	28	18	13	0

