

# PF92952



## Pre-Assembled Primary & Backup Sump Pump System

### Pre-Assembled System Includes

- 1/3 HP cast iron primary sump pump (PF92352).
- 12 Volt DC thermoplastic back up pump (PF92910).
- Two - 1-1/2" check valves, pipe & fittings.

### Product Features - Primary Pump

- 1/3 HP cast iron sump pump with vertical float switch.
- Permanent split capacitor motor.
- 1-1/2" Discharge.
- Handles 1/2" solids.
- Clog resistant thermoplastic impeller.
- Will handle temperatures up to 120° F.
- Pumps up to 60 gpm.
- Stainless steel fasteners.
- 10' Power cord.
- UL listed.

### Product Features - Backup Pump

- 12 Volt DC pump with vertical float switch.
- Alarm/control panel with fuse and mute feature.
- Thermoplastic battery box.
- 2 amp AC battery charger with 10' power cord.
- Battery sold separately.
- Pumps up to 23 gpm.
- 1-1/4" or 1-1/2" NPT discharge size.
- Handles 1/8" solids.


### Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed products to fill any order unless we agree in writing to do otherwise.

- 12 Volt Battery Backup Pump Systems - 3-year limited warranty
- Pre-Assembled Primary & Backup Sump Pump Systems - 3-year limited warranty



PF92952

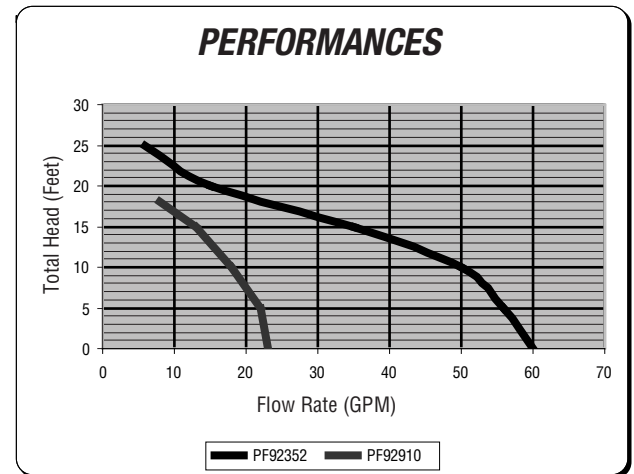

Discharge Height	0'	5'	10'	15'	20'	25'
PF92352 gpm	60	56	50	35	15	6
PF92910 gpm	23	22	28	18	13	0

