



PRODUCT SPECIFICATIONS - MODEL 92333 - 1/3 HP PEDESTAL SUMP PUMP

APPLICATIONS

PEDESTAL SUMP PUMP FOR TYPICAL RESIDENTIAL APPLICATIONS.

MOTOR SPECIFICATIONS

Horsepower	1/3 HP Permanent Split Capacitor
Volts	120
Hz	60
Amps	2.76
Watts	331
Speed	1725 rpm
Phase	Single
Circuit Requirements	15 amp
Duty Rating	Continuous
Capacitor rating	20 uf
Insulation	Class A
Motor Shaft	Stainless Steel
Motor Bearings	Ball
Cooled by	Air cooled
Thermally Protected	Yes - 248°F (120°C)
UL Listed	Yes - E238091

PUMP SPECIFICATIONS

Discharge Size	1 1/4" FNPT
Power Cord	10' - Type SJTW - Water & Oil Resistant, 18 Gauge
Housing	Glass reinforced Nylon
Base	Glass reinforced Nylon
Column	Glass reinforced Nylon
Drive Shaft	Plated Steel
Impeller Material	Glass reinforced Nylon
Impeller Type	Non-Clogging - Open type
Solids Handling	3/16"
Liquid Temp. Range	32°-120° F
Fasteners	Stainless Steel


FLOAT SPECIFICATIONS

Type	Vertical, Pump Mounted
Material	Polypropylene

PERFORMANCES

Max Flow Rate	50 Gallons Per Minute
Maximum Head	20 Feet
Max PSI	8.65

PERFORMANCE CURVE

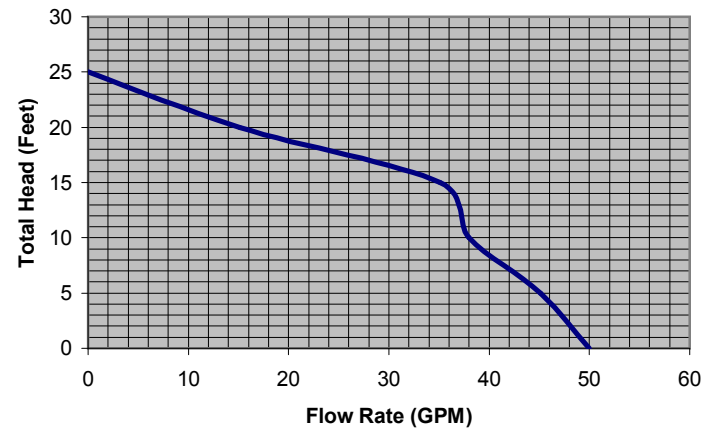

E238091
10RR

PERFORMANCE CHART

Discharge Height	0'	5'	10'	15'	20'	25'
Gallons per Minute	50	45	38	35	15	0
Gallons per Hour	3000	2700	2280	2100	900	0

DIMENSIONS

