

DUPLEX HARD PIPED PACKAGES

APPLICATIONS

Low pressure sewer applications, sewage wastewater transfer for light commercial or residential applications

FEATURES

- Basin is 36" x 48" heavy-duty fiberglass and solid fiberglass cover with non-skid surface
- Basin comes configured with hard pipe installation
- 1-1/4" SCH 80 PVC check valve and ball valve
- SCH 80 PVC discharge piping with union disconnect
- 4" Adapt-A-Flex inlet
- 1-1/4" FNPT discharge flange factory installed
- Control panel with integral pump starting components
- Two 2 hp GP Series grinder pumps
- Four weighted control floats



SERIES SPECIFICATIONS

DUPLEX GRINDER HARD PIPED PACKAGE SYSTEM**

Item No.	Model	Basin			Style	Description
		Size	Height	Discharge Center Line (Installed from top)		
520847	GP-DPLXFG-HP	36" x 48" 61 cm x 121.9 cm	48" 121.9 cm	12" 30.48 cm	Fiberglass	BS3648FGHP

** Multiple Grinder Package configurations and Basin/Cover assemblies available. Please call 1.800.701.7894 for information on additional package specifications not shown here.

PUMP

Item No.	Model	Volts
520862	GP-M231-15	208/230

CONTROL PANEL

Item No.	Model	Volts
513355	1026540	208/230


FLOATS

Item No.	Model	Volts
950266	CFSW	115/230

GRINDER PACKAGES

DUPLEX HARD PIPED PACKAGES

ENGINEERING DATA

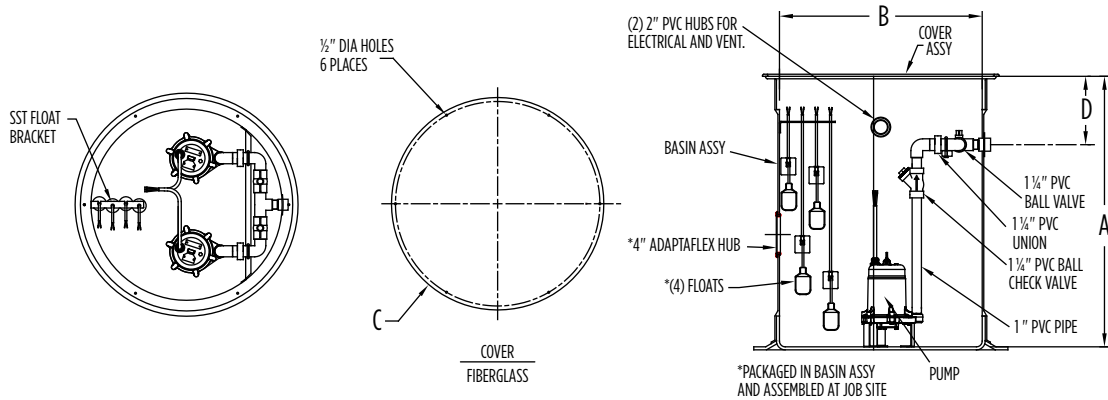

Item No.	Model	A	B	C	D
520847	GP-DPLX3660	48" 122 cm	36" 91.44 cm	40" 101.6 cm	12" 30.48 cm

PUMP PERFORMANCE DATA

