



ProPak System

Pre-piped Combination Battery Backup And Primary Pump Systems
Factory Assembled With 1-1/2" Schedule 40 PVC Pipe And Fittings



Model 508/53[®] or 98 - Aquanot[®] Spin

- 508 pump rated 2,100 GPH @ 10'
- 53[®] pump rated 2,040 GPH @ 10'
- 98 pump rated 3,660 GPH @ 10'
- Self testing and battery monitoring system for peace of mind
- Intelligent multi-stage charger/controller with alarm, light indicator and warning system
- 3 year limited warranty



Model 508/53[®], 63 or 98 - Aquanot[®] Fit Z Control[®] Enabled

- 508 pump rated 2,100 GPH @ 10'
- 53[®]/63 pump rated 2,040 GPH @ 10'
- 98 pump rated 3,660 GPH @ 10'
- Self testing and battery monitoring system for peace of mind
- Intelligent multi-stage charger/controller with alarm, light indicator and warning system
- Built in Wi-Fi[®]
- Two independent, supervised switches
 - Heavy duty mechanical operating switch
 - High water sensor with alarm and pump run redundancy
- FREE Z Control[®] access
 - Email, text, and push notifications
 - Remote monitoring and control
- 3 year limited warranty on system with Models 53[®] and 98 pumps
- 5 year limited warranty on system with Model 63 pump




Model 508/63 - Aquanot[®] Active Z Control[®] Enabled

The Industry's Premium System

- 508 pump rated 2,100 GPH @ 10'
- 63 pump rated 2,040 GPH @ 10'
- Self-testing and multi-stage battery charging
- Early warning diagnostics and alert notifications
- FREE Z Control[®] access
 - Email, text, and push notifications
 - Remote monitoring and control
- 5 year limited warranty


Also Available:
507-0013: entry level
507/73 combo



Search: "Z Control"

**Z Control[®]
Enabled**

See list on reverse
for Z Control[®]
enabled systems

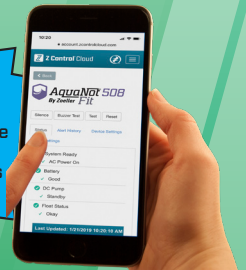

Trusted. Tested. Tough.[®]

zoellerpumps.com 800-928-7867
3649 Cane Run Road, Louisville, KY 40211 USA


FM2954
0720
Supersedes
0420

TOTAL DYNAMIC HEAD FLOW PER MINUTE

DC PUMPS @12.7 VOLTS


MODEL		507		508	
Feet	Meters	Gal	Liters	Gal	Liters
5	1.5	22	83	43	163
10	3.0	13	49	35	132
15	4.6	-	-	27	102
Shut-off Head		14.5 ft. (4.4 m)		22 ft. (6.7 m)	

NOTE: Above performance chart based upon actual performance achieved with a 12 Volt deep-cycle battery. Some manufacturers publish performance data based upon D.C. Pump testing according to Marine Industry standards which can reflect a performance of 40% - 80% higher than actual battery powered performance.

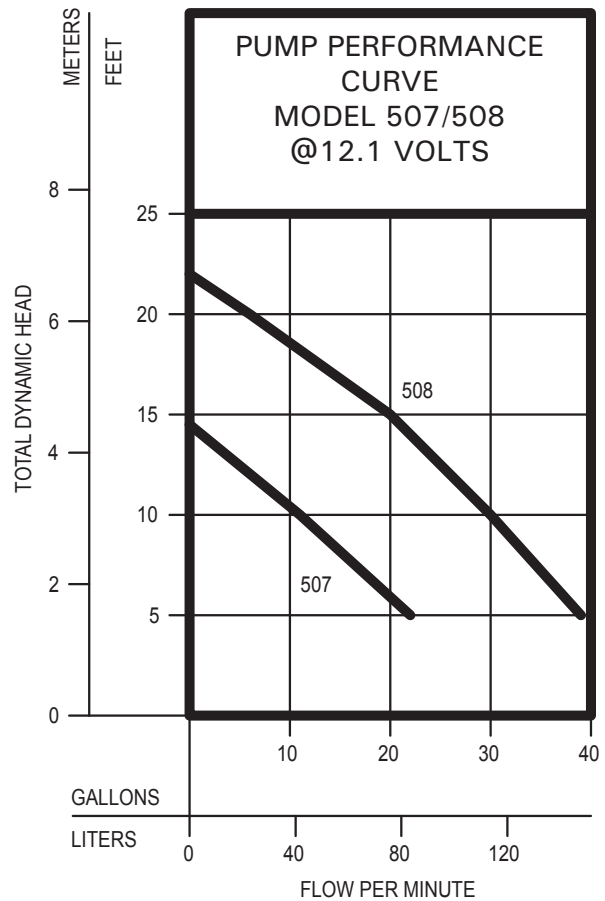

ProPak Item	Controller	73	53®	98	63	Z Control®
507-0013	Basement Sentry I	X				
508-0006	Spin		X			
508-0007	Spin			X		
508-0015	Fit		X			X
508-0016	Fit			X		X
508-0020	Fit				X	X
508-0013	Active				X	X

AC PUMPS

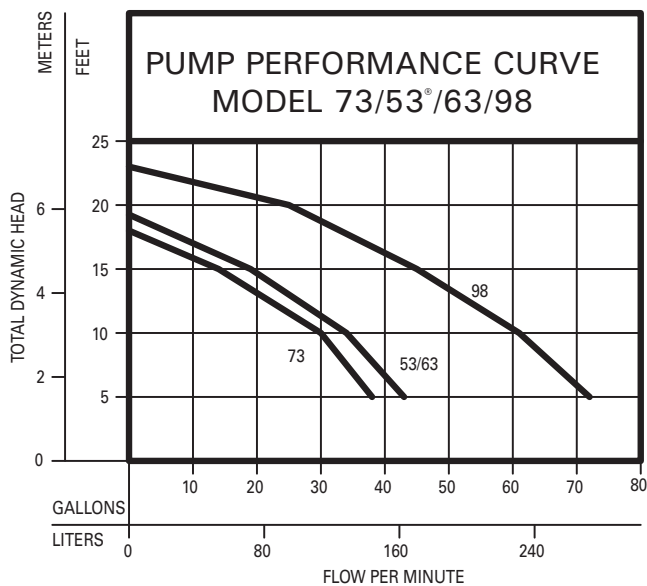

TOTAL DYNAMIC HEAD/FLOW PER MINUTE EFFLUENT AND DEWATERING

MODEL	73		53/63		98		
Feet	Meters	Gal.	Liters	Gal.	Liters	Gal.	Liters
5	1.5	38	144	43	163	72	273
10	3.0	30	114	34	129	61	231
15	4.6	14	53	19	72	45	170
20	7.1	--	--	--	--	25	95
Shut-off Head:		18 ft.(5.5 m)		19.25 ft.(5.9 m)		23 ft.(7.0 m)	

See FM2897 (Model 73), FM2778 (Model 53®), FM2899 (Model 63) or FM2779 (Model 98) for complete pump specifications.



All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).