

Wastewater

5.5-ASP




Features

- 1/4 HP
- 1-1/4" FNPT outlet with a garden hose adapter
- 10' or 25' length power cords are available
- Integral snap-action float switch
- Automatic operation has 7"-10" "ON" level range and 2"-5" "OFF" level range
- Thermally protected
- 3/8" solid handling capacity

Dimensional Outline


Typical Installation

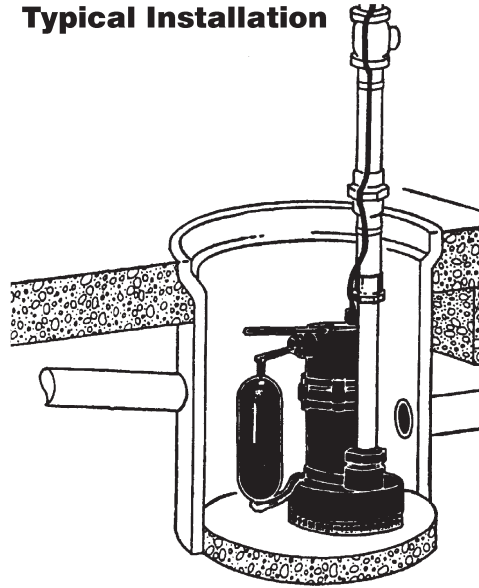

Specifications

Model No.	Item No.	Listing(s)	HP	Volts	Hertz	Running Amps	Watts	Performance (GPM @ Head)				Shut Off		Power Cord (ft.)	Weight (lbs.)	Dimensions
								1'	5'	10'	20'	Feet	PSI			
5.5 ASP	505700	UL/CSA	1/4	115	60	8.5	660	40	35	30	10	25.0	10.8	10	10.25	10-3/4 x 8-7/8 x 6
5.5 ASP	505701	UL/CSA	1/4	115	60	8.5	660	40	35	30	10	25.0	10.8	25	10.25	10-3/4 x 8-7/8 x 6

Performance Data

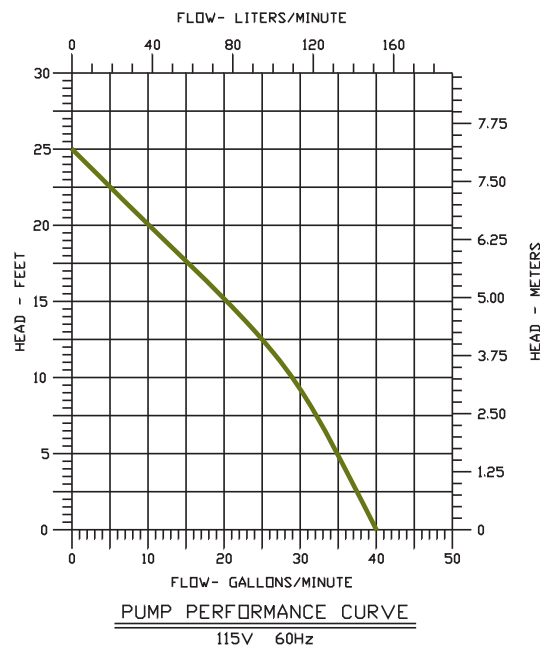

Franklin Electric

P.O. Box 12010
 Oklahoma City, OK 73157-2010
 Phone: 1.800.701.7894
 Fax: 1.800.678.7867
www.LittleGiantPump.com

©2007 Franklin Electric Co., Inc.
 Little Giant® is a registered trademark of Franklin Electric Co., Inc.
 Form 995527 — 04/08